

General		
Frequency Range		VHF1: 136-174MHz UHF1: 400-470MHz, 400-527MHz
Channel Capacity		1024
Zone Capacity		16 (PD60X(UL913), each with a maximum of 16 channels) 64 (PD66X/PD60X(UL913), each with a maximum of 256 channels)
Channel Spacing		25/20/12.5kHz
Operating Voltage		7.4 V
Battery(Li-Ion)		2000mAh
Battery Life (5/5/90)		Digital: 21 Hours @2000mAh Analog: 14.5 Hours @2000mAh
Weight		PD60X(UL913): 324g (2000mAh) PD66X/PD68X(UL913): 344g (2000mAh)
Dimensions		PD60X(UL913): 119 x 54 x 33 mm (2000mAh) PD66X/PD68X(UL913): 122 x 54 x 33 mm (2000mAh)
Frequency Stability		±0.5 ppm
Antenna Impedance		50Ω
Receiver		
Sensitivity (Analog)		0.22μV (12dB SIN AD) 0.22μV (Typical) (12dB SIN AD) 0.4μV (20dB SIN AD)
Sensitivity (Digital)		0.22μV/BER 5%
Adjacent Selectivity	TIA-603	60dB @ 12.5kHz/70dB @ 20 & 25kHz
	ETSI	60dB @ 12.5kHz/70dB @ 20 & 25kHz
Spurious Response Rejection	TIA-603	70dB @ 12.5/20/25kHz
	ETSI	70dB @ 12.5/20/25kHz
Inter-Modulation	TIA-603	70dB @ 12.5/20/25kHz
	ETSI	65dB @ 12.5/20/25kHz
Hum & Noise		40dB @ 12.5kHz 43dB @ 20kHz 45dB @ 25kHz
Rated Audio Power Output		0.5W
Rated Audio Distortion		≤3%
Audio Response		+1 ~ -3dB
Conducted Spurious Emission		<-57dBm

Transmitter	
RF Power Output	VHF High power 5W VHF Low power 1W UHF High power 4W UHF Low power 1W
	11K0F3E @ 12.5kHz 14K0F3E @ 20kHz 16K0F3E @ 25kHz
4FSK Digital Modulation	12.5kHz Data Only: 7K60FXD 12.5kHz Data & Voice: 7K60FXW
Conducted/Radiated Emission	-36dBm <1GHz -30dBm >1GHz
Modulation Limiting	±2.5kHz @ 12.5kHz ±4.0kHz @ 20kHz ±5.0kHz @ 25kHz
FM Hum & Noise	40dB @ 12.5kHz 43dB @ 20kHz 45dB @ 25kHz
Adjacent Channel Power	60dB @ 12.5kHz 70dB @ 20/25kHz
Audio Response	+1 ~ -3dB
Audio Distortion	≤3%
Digital Vocoder Type	AMBE++ or SELP
Digital Protocol	ETSI-TS102 361-1,-2,-3
Environmental	
Operating Temperature	-30℃ ~ +55℃
Storage Temperature	-40℃ ~ +85℃
ESD	IEC 61000-4-2 (Level 4) ±8kV (Contact) ±15kV (Air)
American Military Standard	MIL-STD-810 C/D/E/F/G
Dustproof & Waterproof	IP67 Standard
Humidity	Per MIL-STD-810 C/D/E/F/G Standard
Shock & Vibration	Per MIL-STD-810 C/D/E/F/G Standard
GPS	
TTFF (Time To First Fix) Cold Start	<1 minute
TTFF (Time To First Fix) Hot Start	<10 seconds
Horizontal Accuracy	<10 meters

PD60X/66X/68X, X=0, 2, 5,6 or 8, model number varies geographically. For details, please contact our regional sales representatives. All specifications are subject to change without notice due to continuous development.



PD60X/PD66X/PD68X(UL913) Intrinsically Safe Digital Migration Radio

- UL/TIA4950 Certified explosion-proof DMR Portable Tow-way Radio
- Designed for Hazardous Working Environments
- DMR TIER II &TIER III Standard Radio, Innovative Design
- Compact Size, Integrates with Hytera Applications





PD60X/
PD66X/
PD68X(UL913)

PD60X/PD66X/PD68X(UL913) are specially designed for those who work in environments with explosive gas and combustible dusts, where using regular radios could be unsafe. Hytera understands the challenges in hazardous environments and is dedicated to designing and developing safer radios for more and more customers. Hytera launched PD60X/PD66X/PD68X(UL913), portable explosion-proof DMR radio with ergonomic and rugged design. Easy to use, long battery life and UL913/TIA4950-rated for safety.

Applications


Oil & Gas, Refinery, Chemical Industry, Fire Fighting



PD60X/PD66X/PD68X(UL913) in this document are intrinsically safe, they are different from the conventional types.

UL913/TIA4950 Certificate

Class I II III-Division 1, Group C-G, -30°C to 55°C, T4

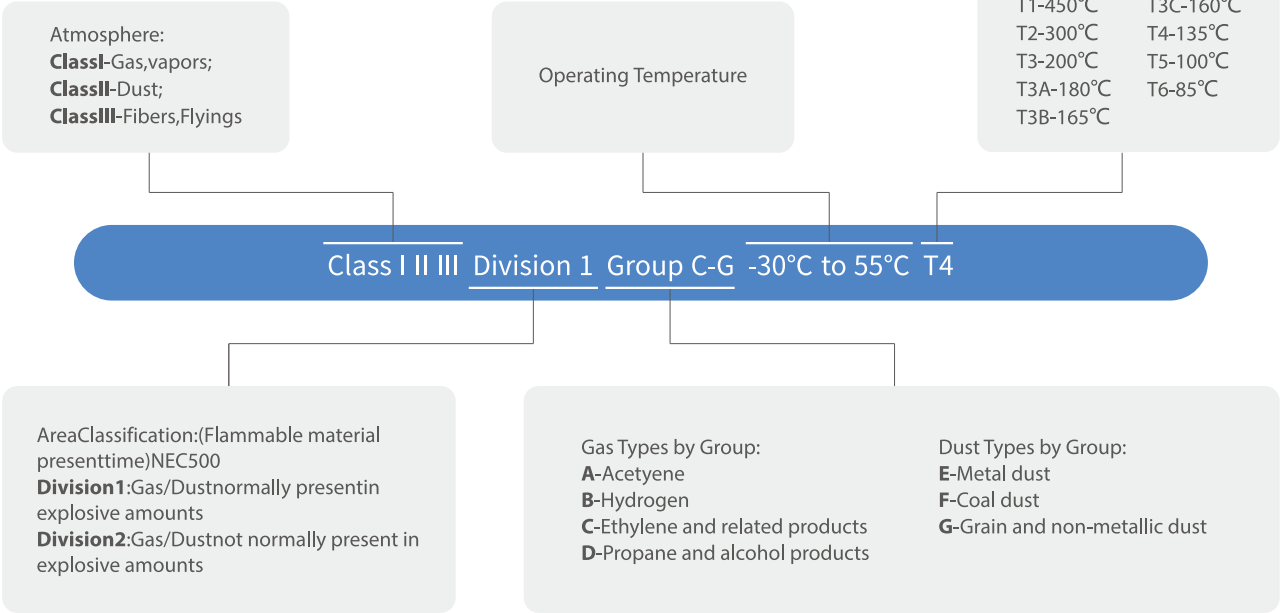

Features

Small, Sleek, Light

The size is 119x54x33mm (PD60X(UL913))/133x54x33mm(PD66X/PD60X(UL913)), PC & Metal frame, weight is 324g(PD60X(UL913))/344g(PD66X/PD68X(UL913)).

IP67 Compliance


IP67 rated withstanding up to 1m submersion for 30 minutes or more.

Rugged & Reliable

Compliant with MIL-STD-810 C/D/E/F/G standards.

Pseudo Trunk

This virtual trunking feature allocates a free timeslot for urgent communications. This effectively enhances frequency efficiency and allows you to communicate in a timely manner in emergency situations.

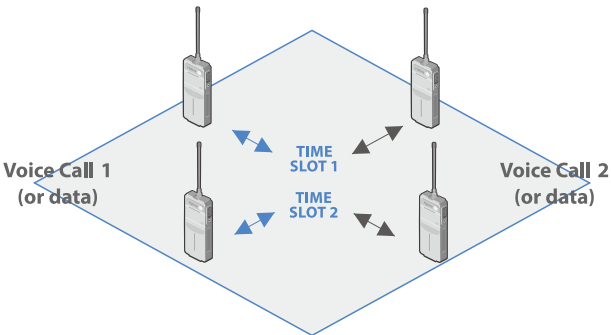

Solt 1, Solt 2 are automatically assigned to voice call 1 or voice call 2.

Secure Communication

Provides basic/advanced digital encryption and Scrambler feature in analog mode.

DMRA Data Service

The data protocol is fully compliant to DMRA standard.

GPS Positioning (Factory Option)

The built-in GPS module supports GIS applications.

Man Down (Factory Option)

When a user falls down, the radio can automatically alert others.

Further Development Port

The reserved side port in PD6 Series allow users or any third party partner to further develop other helpful applications to extend radio functionalities.

Supplementary Features

Pd6 Series provide radio enable/disable, remoter monitor and Priority Interrupt.

Radio Priority-Based Interruption

Enable an administration or manager radio to interrupt calls for emergency or urgent communication.

Advanced Signaling

Supports multiple advanced analog signaling modes, including HDC1200, 2-Tone and 5-Tone, providing better integration into existing analog radio fleets.

Accessories




Pictures above are for reference only and may vary from actual products.

Applications

This is a sample topology of Hytera dispatch system: server,

Hytera dispatch system provides a variety of dispatching features: such as selective voice calls, voice recording, GPS tracking, alarm management, and much more.

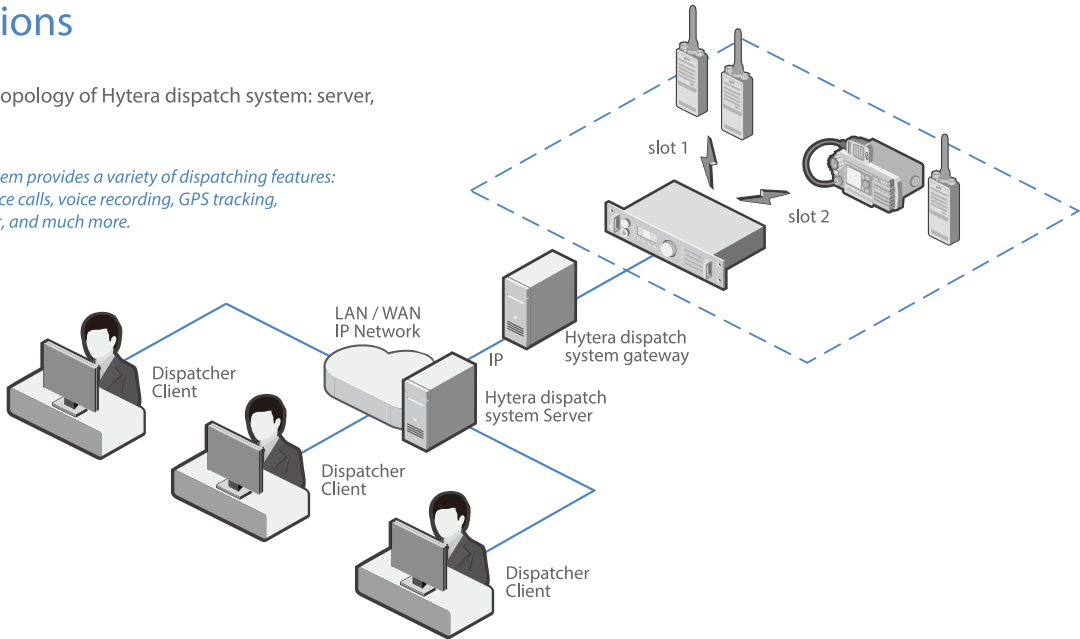

- EAN19 3-wire Surveillance Earpiece with Transparent Acoustic Tube
- EAN24 2-wire Surveillance Earpiece with Transparent Acoustic Tube
- EHN21 C Style Earloop Earpiece with PTT&MIC cable
- EHN26 C-earset with in-line MIC
- EHS17 Receive-only Flexible Earpiece
- EHS18 Receive-only C-style Earpiece
- ESN14 Earbud with PTT&MIC cable
- ACN-02 PTT&MIC cable (used with Receive-Only Earpiece)
- ES-02 Receive-Only Transparent Acoustic Tube Earpiece
- EH-01 Receive-Only C Style Earloop
- EH-02 Receive-Only Swivel Earpiece
- ES-01 Receive-Only Earbud
- EAS03 Receive-Only Earpiece with Transparent Acoustic Tube
- ESS10 Receive-Only Earbud
- SM26N2 Remote Speaker Microphone with emergency button and 2.5mm audio jack(IP54)
- CH10A06 Dual Pocket MCU Charger Kit
- MCA05 Battery Optimizing System